
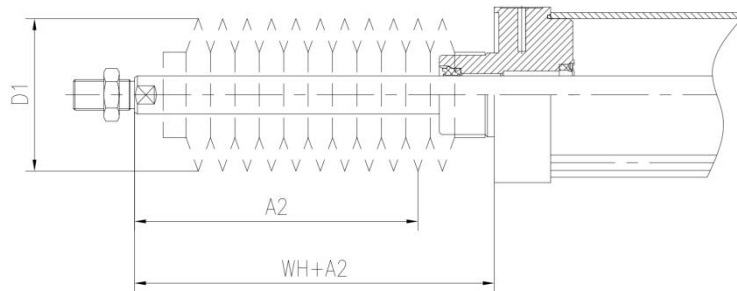


FCZ Dust guard

General technical parameters							
Type FCZ-	Technical characteristics	32	40	50	63	80	100
	Stroke [mm]	10 ... 500	10 ... 500	10 ... 500	10 ... 500	10 ... 500	10 ... 500
	Material / tolerance temperature	Rubber woven cloth: -30 °C~120°C Enhance the nylon cloth: -40°C~145°C High temperature canvas: -30°C~210°C Silicon gel coated glass fiber cloth: -30°C~1100°C;					
	Medium tolerance	Dust, debris, oil, grease, fuel oil, etc					
	Type of mounting	By holding the hoop					
	Mounting position	Pole end					
	levels of protection	IP54					
	Corrosion resistance grade	3					



Dimensions and Type																		
Diameter φ	32			40			50			63			80			100		
	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2	A2	D1 Max	WH +A2
10...50	29	38	55	28	46	56.7	28	57	63.6	28	57	63.9	25	93	70.4	25	93	74.3
51...125	47		73	43		71.7	46		81.6	46		81.9	37		82.4	37		86.3
126...175	61		87	56		84.7	56		91.6	56		91.9	49		94.4	49		98.3
176...250	80		106	72		100.7	73		108.6	73		108.9	62		107.4	62		111.3
251...300	96		122	86		114.7	86		121.6	86		121.9	74		119.4	74		123.3
301...350	112		138	100		128.7	97		132.6	97		132.9	86		131.4	86		135.3
351...375	114		140	101		129.7	105		140.6	105		140.9	87		132.4	87		136.3
376...425	130		156	115		143.7	116		151.6	116		151.9	98		143.4	98		147.3
426...475	145		171	130		158.7	126		161.6	126		161.9	110		155.4	110		159.3
476...500	147		173	131		159.7	134		169.6	134		169.9	111		156.4	111		160.3